


Compact InfraRed Camera (120x120 IR Resolution)

Easy-to-Use Troubleshooting Tool - Weighs only 12oz

- Compact sized, Lightweight - 12oz
- Thermal Sensitivity of 0.1°C @ 25°C
- Easy-to-Use Focus Free Lens
- Stores up to 5000 JPEG Images
- 2.8" LCD Color Display
- Long Battery Life Lasts >4 Hours
- Convenient Thumbnail Image Gallery



Pocket Sized



Large 2.8" Display



Detect hidden problems fast



Includes PC software



FLIR i7 Features

- **High accuracy** — 2% and thermal sensitivity of 0.1°C helps you find problems faster and easier — critical for condition monitoring of thermally sensitive targets
- **Extremely lightweight** — Resulting in less user fatigue (12 ounces)
- **Easy-to-use** — Pocket sized and fully automatic design makes it incredibly easy-to-use even for first time users — perfect for general purpose use
- **Focus free lens** — For convenient viewing
- **High Resolution LCD** — 2.8" (71mm) color LCD
- **Double Molded Design** — Rugged design with easy grip handle construction meets IP43 dust/splashproof standards
- **Measurement Modes** — Spot (center), Area (Min/Max), and Isotherm (above/below) display measurement modes
- **Long Battery Life** — >4 hour continuous operation on a single charge for uninterrupted inspections
- **Large Memory Storage** — microSD card stores up to 5000 Radiometric JPEG format images. Each image can be analyzed using the included QuickReport™ PC Software
- **Includes** — 512MB microSD Card, miniSD™ adaptor, Li-Ion rechargeable battery with 100-240V AC adaptor /charger with EU, UK, US and Australian plugs, QuickReport™ software with USB Mini-B cable, built-in manual lens shutter, hand strap, and hard case



Distributed by



The ENERGY CONSERVATORY



DIAGNOSTIC TOOLS TO MEASURE BUILDING PERFORMANCE



The Difference is Training


Get the most out of your FLIR IR camera investment with world-class instruction through the Infrared Training Center (ITC), the largest infrared applications training organization in the world. The ITC's Level 1 Infrared Thermography Training Course is geared to the new infrared camera user and focuses on its use for a variety of condition monitoring/predictive maintenance applications. Level 2 and Level 3 certificate courses for more advanced infrared training are also available. Courses are taught by certified instructors with extensive experience in a wide variety of infrared thermography and thermal imaging applications. ITC certifications are recognized by major professional organizations.

- **Preventive Maintenance** — Thermal imaging is a valuable tool in preventive maintenance of electrical, mechanical and structural systems, able to help detect problems, prevent unscheduled downtime, guide needed corrective action and increase plant safety.
- **Utility Market** — In the utility industry, failure is not an option. That's why infrared thermal imaging has become a key tool for predictive maintenance programs for utility firms everywhere.
- **Energy Audits** — Energy costs are increasing at a substantially alarming rate. Missing or low quality insulation, inadequate Heating, Ventilation, and Air Conditioning (HVAC) systems, poor air flow — all are typical problems that cause homes to waste energy.



FLIR i7 Specifications

Features	
Temperature range	32°F to 482°F (0°C to 250°C)
Image Storage	5000 Images (microSD card memory)
Emissivity	Emissivity Table; 0.1 to 1.0 adjustable
Imaging Performance / Image Presentation	
Field of view/min focus distance	25° X 25°/0.6m (2 ft.)
Focus	Focus free
Thermal sensitivity (N.E.T.D)	<0.1°C at 25°C
Detector Type	Focal plane array (FPA) uncooled microbolometer; 120 X 120 pixels
Spectral range	7.5 to 13µm
Display	2.8" color LCD
Image Controls	Palettes (Iron, Rainbow, and Black/White)
Set-up controls	Date/time, °C/°F, 21 languages
Measurement modes	Spot (with correction for emissivity and reflected temperature), Area (Max/Min), Isotherm (above/below selected temperature interval)
Battery Type	Li-Ion
Battery operating time	>4 hours, Display shows battery status
Charging system	In camera, AC adapter; 3 hours to 90% capacity
AC operation	AC adaptor 100-240VAC, 50/60Hz
Adaptor Voltage	5 VDC output to camera
Operating temperature range	32°F to 122°F (0°C to 50°C)
Storage temperature range	-40°F to 158°F (-40°C to 70°C)
Humidity	Operating and storage 20% to 80%, non-condensing, IEC 359
Shock	25G, IEC 68-2-29
Vibration	2G, IEC 68-2-6
Dimensions/Weight	8.8x3.1x3.3" (223x79x83mm)/<12oz. (340g), including battery

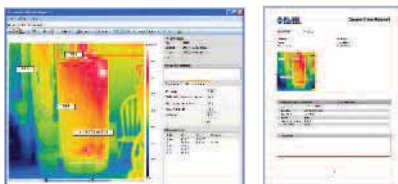

QuickReport™ PC software enables user to analyze Temperature of all thermal pixels of any FLIR Camera JPEG images

Ordering Information

Part Number		
FLIR i7	Compact Infrared Camera	\$2995.00
ACCESSORIES		
1950986	Replaceable Battery Li-Ion Cell 3.6V	\$135.00
T910711	Power Supply Charger (100-240VAC, 5VDC, 6W)	\$180.00
CA930-F	Camera Pouch Case with Detachable Shoulder Strap	\$65.00
CERTIFICATION TRAINING		
ITC LEVEL 1	ITC Level 1 Certification Training per attendee	\$1750.00

To order or for more information call
 The Energy Conservatory at 612-827-1117
 Or visit our website at www.energyconservatory.com

